

Ideal Retail Display







@tajimatoolusa

For more information, please contact our marketing department at orderdesk@tajimatool.com

TAJIMA TOOL CORPORATION 3510 Torrance Blvd., Suite 301, Torrance, CA 90503

Toll-Free Phone:1-888-482-5462 www.tajimatool.com

© 2022 TAJIMA TOOL CORPORATION. ALL RIGHTS RESERVED.


No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, without the prior written permission of the publisher.



Tauma

HOTNEWS

PRODUCT SPECIFICATION TABLE

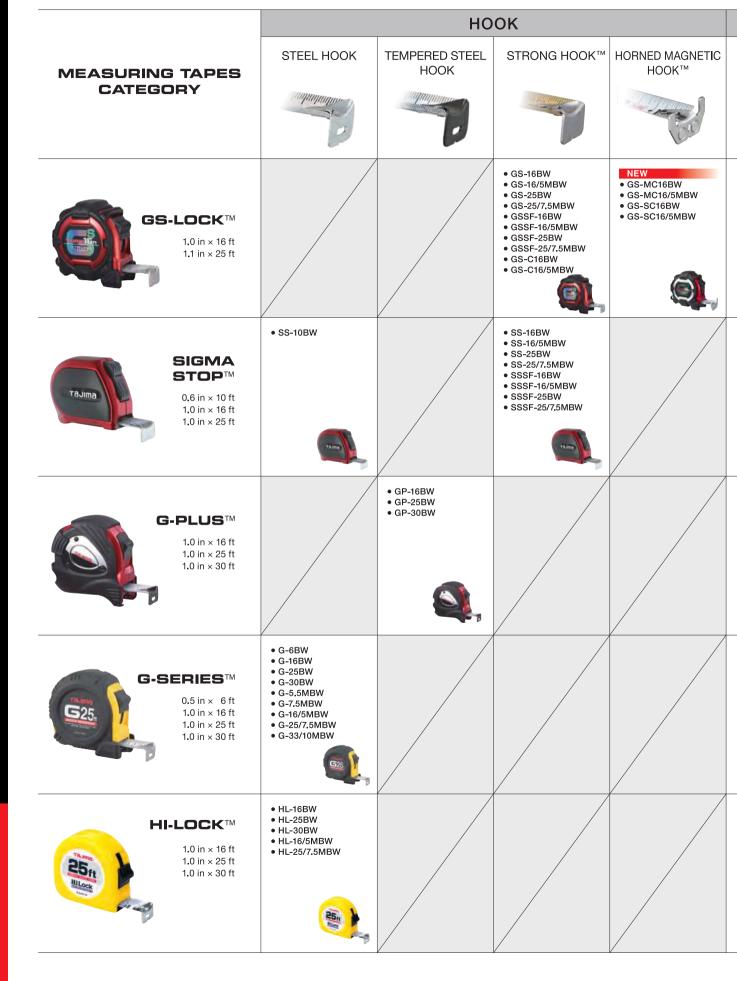








HOOK™





ARMORED CASE Shock-resistant armored case protects the housing from impact Prevents dropping or mislaying.

during inadvertent dropping.






SAFETY ROPE TETHER STRONG TAPE & HOOK END HOOK GUARD With a thickness of 1.6 mm, the Thick elastomer case armor



Compatible clip is newly designed to allow for

TAJIMA Safety Belt Holder™ 🖶 🚜 🕒



GS-LOCK™ **COMPATIBLE CLIP**











EM CODE	2 3 4	4 5 6 7 8	<u></u>	2	CASE	MASTER CARTON	UPC
S-C16BW	1 in (05 mm)	16 ft	9.0 ft / 0.5 m	12.5 ft / 3.8 m	6	30 (5 sets)	0-49296-12264-5
S-C16/5MBW	1 in (25 mm)	16 ft / 5 m	8.2 ft / 2.5 m	12.5 11 / 3.8 111			0-49296-12265-2

GS-LOCK™ **HORNED MAGNETIC HOOK COMPATIBLE CLIP**





Neodymium magnet (260 mT) Magnet feature enables solo work



Compatible clip is newly designed to allow for

TAJIMA Safety Holder™

standard tape measures

• Compatible clip is newly designed to allow for

• Extra-thick steel generates more stiffness than

1 in (25 mm) standard tape measures

TAJIMA Safety Belt Holder™

• Compatible clip is newly designed to allow for

• Extra-thick steel generates more stiffness than

• Thick elastomer case armor extends around the body of the

1 in (25 mm) standard tape measures

TAJIMA Safety Belt Holder™

• Thick elastomer case armor extends around the body of the





		Idama					
ITEM CODE	23	4 5 6 7 8	1	2	CASE	MASTER CARTON	UPC
GS-MC16BW	1 :- (05)	16 ft	8.2 ft / 2.5 m	12.5 ft / 3.8 m	6	30 (5 sets)	0-49296-12266-9
GS-MC16/5MBW	1 in (25 mm)	16 ft / 5 m		12.5 11 / 3.6 111			0-49296-12267-6
							_

• Extra-thick steel generates more stiffness than 1 in (25 mm)

• Thick elastomer case armor extends around the body of the

tape measure to protect end hooks and work surfaces

GS-LOCK[™] MAGNETIC POWER x2 **COMPATIBLE CLIP**











TEM CODE	2 3 4	45678		2	CASE	MASTER CARTON	UPC
GS-SC16BW	1: (05)	16 ft	8.2 ft / 2.5 m	12.5 ft / 3.8 m	9	20 (F. acta)	0-49296-12268-3
GS-SC16/5MBW	1 in (25 mm)	16 ft / 5 m	0.2 11 / 2.5 111	12.5 11 / 3.6 111	0	30 (5 sets)	0-49296-12269-0

CLIP_n-HOLD

SAFETY BELT HOLDER™

CLIP-n-HOLD™ **SAFETY BELT HOLDER**






 Allows one-handed hooking/unhooking • Prevents from dropping or mislaying



CASE	MASTER CARTON	UPC
0	00	0-49296-02995-1
О	60	0-49296-12253-9
	6	6 60

BELT CLAMPING SYSTEM









CLIP-n-HOLD™

ITEM CODE	CASE	MASTER CARTON	UPC
SF-CHLD	6	60	0-49296-16913-8









ITEM COD

DE	CASE	MASTER CARTON	UPC
	6	60	0-49296-169

Prevents from dropping or mislaying







• For vertical harness belts • Prevents from dropping or mislaying



CLIP-n-HOLD™ **METAL BODIED**

Up to 0.1 in (3 mm) thick

ITEM CODE SF-MHLD



0-49296-16914-5

 For waist belts Rugged metal construction



CLIP-n-HOLD™ METAL BODIED FOR VERTICAL HARNESS



CASE MASTER

op to our in (o mini) tillor			
ITEM CODE	CASE	MASTER CARTON	UPC
SF-MTHLD	6	60	0-49296-26295-2
			_



• For vertical harness belts

Rugged metal construction



LOOP for CLIP-n-HOLD™





WEARABLE ADJUSTABLE BELL SIZ	_
Up to 2.9 in (75 mm) wid	
Up to 0.3 in (8 mm) thick	

ITEM CODE	CASE	MASTER CARTON	UPC
SF-LOOP	1	100	0-49296-12272-0

SAFETY ROPE™

- For Attached Tool Weights: up to 20 oz (567 g) • Standard Overall Length: 16.5 in (420 mm) (max, including halter snap)
- Extended Length: 59.1 in (1,500 mm) (including halter snap)
- Rope Tether Diameter: 0.1 in (3.2 mm) (polyurethane resin) Core Diameter: 0.03 in (0.8 mm) (Vectran*)





ITEM CODE	CASE	MASTER CARTON	UPC
AZS-ROP	6	60	0-49296-02993