LED LIGHT LE-CL501D-SP

LUMINANCE

HYBRID

CONSTANT

brightness for At 500 lx

(180 lm)

Ideal Retail Display

Let us help you display and promote your Tajima products!





ZP3730

3.7v

NEW




- FLOOD BEAM[™] is ideal for work at hand with an even luminosity • Hybrid power source takes dedicated rechargeable battery
- (included) or AA batteries
- The external battery compartment can be easily opened or closed with gloves on
- 500 lm boost light for 10 seconds
- The band fits nicely over the hard hat
- Helmet clips prevent the light from slipping off during work


• Flicker-Free light





LOOD BEAM Takes both rechargeable battery or AA batteries power source





LITHIUM-ION BATTERY • High-capacity, long-lasting battery • Voltage: 3.7 V; Capacity: 3000 mAh

ITEM CODE	CASE	MASTER CARTON	UPC
LE-ZP3730	1	96	0-49296-16558-1

www.tajimatool.com

TAJIMA TOOL CORPORATION 3510 Torrance Blvd., Suite 301, Torrance, CA 90503

Toll-Free Phone: 1-888-482-5462 www.tajimatool.com

© 2023 TAJIMA TOOL CORPORATION. ALL RIGHTS RESERVED. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, without the prior written permission of the publisher. Date of issue 9/23/2023





For more information, please contact our marketing department at orderdesk@tajimatool.com

NEW LED LIGHT GRATE CONSTANT **LUMINANCE**[™]

GRATI-LITE






HOTNEWS VOL.

CONSTANT LUMINANCE

Keeps the same brightness until the battery runs out



Constant current circuit can maintain the brightness to be continuous without dimming in the selected light mode until the battery runs out.

Powered by high-intensity boost light



When you press the boost light button, it lights up for 10 secondswith a maximum output of 500 lm, which is convenient for checking and inspecting work and looking over a slightly wider area

* With overheat protection for continual use of boost light





Dust and water resistant design Reliable in harsh environments Dust and water resistance : IP66 Shock Resistant (Up to 2.0 m)



External Battery operated

External battery position evenly distributes the ideal balance without an imbalance of weight toward the front of the LED Light





modes of brightness

Im boost light for 10 second






Equipped with padded front bracket Non-slip for a more comfortable fit on the skin



Anti-slip headband The wider silicon headband provides greater comfort and less slipage

Pick the LED LIGHT that best fits your needs

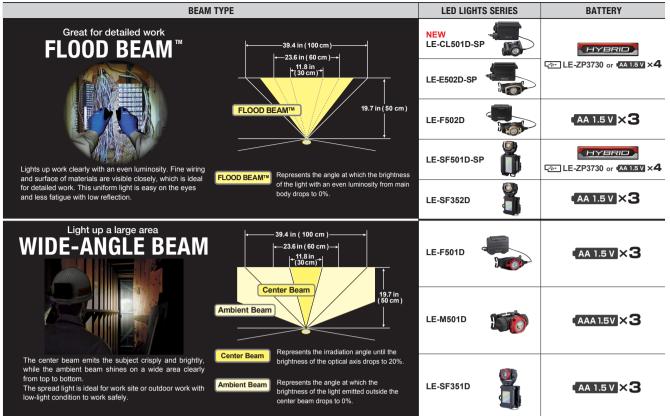

GRATI-LITE[™] LE-SF501D-SP


















- (included) or AA batteries
- Safety Holder that can be attached to the vertical harness belt • 3 modes of brightness: 50 Im \rightarrow 250 Im \rightarrow 500 Im
- Flicker-Free light
- A molded hole for lanyard attachments to prevent dropping



FLOOD BEAM


takes dedicated rechargeable battery


Hybrid power source Neodymium magnet Can be attached facing can be attached to any up or down ferromagnetic metal

UPC

UPC

0-49296-16558-1





LITHIUM-ION BATTERY • High-capacity, long-lasting battery • Voltage: 3.7 V; Capacity: 3000 mAt **ZP3730** 3.7v

Tours	ITEM CODE	CASE	MASTER CAF
	LE-ZP3730	1	96

• Voltage: 3.7 V; Capacity: 3000 mAh

GRATI-LITE[™] LE-SF351D

350m

CLIP_n Hold



Specification


















LE-SF352D















• Safety Holder that can be attached to the vertical harness belt • 3 modes of brightness: 15 Im \rightarrow 150 Im \rightarrow 350 Im • Can be used as a work light

Flicker-Free light

• A molded hole for lanyard attachments to prevent dropping • Strong Neodymium magnet on the back



et	use on your back

•						
FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STA	NDARD	LE-SF351D
31/2	350 LUMENS	150 LUMENS	15 LUMENS	29400	2m	
\square					LIGHT DIS	STRIBUTION
IUI	8h	20h	65h	Center	Light Beam	Ambient Light Beam
					24°	()163°
	108m					
ITEM CODE		CAS	SE M/	ASTER CA	RTON	UPC
LE-S	6	6 24		0-49296-26681-3		

• FLOOD BEAM[™] is ideal for work at hand with an even luminosity • Safety Holder that can be attached to the vertical harness belt • 3 modes of brightness: 15 Im \rightarrow 150 Im \rightarrow 350 Im Strong Neodymium magnet on the back

Flicker-Free light

• A molded hole for lanyard attachments to prevent dropping





20h | 65h

6

can be attached to up or down



3000 mAh

HYBRID

LE-ZP3730 or


AA 1.5 V X4

500

GRATI-LITETh

LE-F502D






- Hybrid power source takes dedicated rechargeable battery (included) or AA batteries
- The external battery compartment can be easily opened or closed with gloves on
- 3 modes of brightness: 50 Im \rightarrow 250 Im \rightarrow 500 Im
- The band fits nicely over the hard hat
- Helmet clips prevent the light from slipping off during work
- Flicker-Free light



rechargeable battery switch the lighting or AA batteries modes



- FLOOD BEAM[™] is ideal for work at hand with an even luminosity
- The external battery compartment can be easily opened or closed with gloves on
- 3 modes of brightness: 50 Im \rightarrow 250 Im \rightarrow 500 Im
- The band fits nicely over the hard hat
- Helmet clips prevent the light from slipping off during work
- Flicker-Free light



steel

83°

24

UPC

0-49296-26717-9





Press the button to switch the lighting

Specifications						
FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STANDARD LE-F5	02	
342	500 LUMENS	250 LUMENS	50 LUMENS	2m 307cd		
\bigcirc	6h	10h	25h	LIGHT DISTRIBUTION		
	35 m			83		

ITEM CODE	CASE	MASTER CARTON	UPC
LE-F502D	6	24	0-49296-26709-4











GRATI-LITE[™] **LE-F501D**



- Illuminated surface diameter is approximately 39.3 in (100 cm) when emitted at 19.6 in (50 cm) away from the subject
- The external battery compartment can be easily opened or closed with gloves on







Specifications

	•						
	FL1 STANDARD	MODE 3	MODE 2	MODE 1	FL1 STANDARD	LE-F501D	
	342	500 LUMENS	250 LUMENS	50 LUMENS	2m 3480cd		
	\bigcirc	бh	10h	25h	Center Light Beam	STRIBUTION Ambient Light Beam	
		118 m			26°	165°	
DEAM.							
	ITEN	I CODE	CAS	SE MA	STER CARTON	UPC	
	LE-F	501D	6		24	0-49296-26679-	0



GRATI-LITE[™]

LE-M501D

500



• Illuminated surface diameter is approximately 36.6 in (93 cm)	
• manimated surface diameter is approximately color in (co cin)	
when emitted at 19.6 in (50 cm) away from the subject	

- Strong Neodymium magnet on the back
- Detachable, rotate and slide mechanism
- Shut-off mode prevents accidental activation and battery depletion







Specifications

Specificat	10115								
FL1 STANDARD	MODE 3	MODE 2	MODE	E 1	FL1 STANDARD LE-M501D				
342	500 LUMENS	250 LUMENS	50 LUME		2m 2500cd				
\bigcirc	4h	6h	15	h	LIGHT DISTRIBUTION Center Light Beam				
	100 m				32° 86°				
ITEM CODE CASE MA					TER CARTON UPC				







ITEM CODE	CASE	MASTER CARTON	UPC
LE-M501D	6	24	0-49296-26680-6

