


SPECIFICATIONS AND FUNCTIONS TABLE

Convoy® SERIES	SPECIFICATIONS	CARTRIDGE SIZE	WEIGHT	MATERIALS		FUNCTIONS	THRUST SYSTEMS	THRUST RATIO	VISCOSITY
				BARRELS	GRIPS				
1	Convoy® BC™ NEW		10 fl. oz. / 300 ml	28 oz. / 785 g	Resin	Resin	—	—	10 : 1
2	Convoy® Super 26 DUO™		22 fl. oz. / 650 ml 16 fl. oz. / 450 ml	58 oz. / 1,650 g	Metal	Metal	—	TT System	26 : 1
3	Convoy® Super 26 Sausage Gun 2way™		10 fl. oz. / 300 ml	39 oz. / 1,100 g	Metal	Metal	360° RH	Enhanced SST	26 : 1
	Convoy® Super Sausage Gun 2way™		20 fl. oz. / 600 ml	35 oz. / 990 g	Metal	Metal + Resin	360° RH AFS System	TT System	12 : 1
4	Convoy® Bulk Super 3Way™		10 fl. oz. / 300 ml	42 oz. / 1,200 g	Aluminum	Aluminum	360° RH	Enhanced SST	10 : 1
5	Convoy® RS™		10 fl. oz. / 300 ml 30 fl. oz. / 900 ml	26 oz. / 740 g 33 oz. / 940 g	Metal	Resin	360° RH	DP Enhanced SST	8 : 1 16 : 1
6	Convoy® Super™ 26		10 fl. oz. / 300 ml 30 fl. oz. / 900 ml	25 oz. / 710 g 35 oz. / 1,005 g		Metal + Resin	360° RH	Enhanced SST	26 : 1
7	Convoy® Super™ 18		10 fl. oz. / 300 ml 30 fl. oz. / 900 ml	25 oz. / 710 g 35 oz. / 1,005 g	Metal	Metal + Resin	360° RH	Enhanced SST	18 : 1
8	Convoy® Super™		10 fl. oz. / 300 ml 30 fl. oz. / 900 ml	25 oz. / 710 g 35 oz. / 1,005 g		Metal + Resin	360° RH AFS System	TT System	12 : 1
9	Convoy® Plus II™		10 fl. oz. / 300 ml 30 fl. oz. / 900 ml	21 oz. / 605 g 32 oz. / 900 g	Metal	Resin	360° RH AFS System	TT System	7 : 1
10	Convoy® Lite™		10 fl. oz. / 300 ml	17 oz. / 480 g		Resin	AFS System	TT System	7 : 1


THRUST SYSTEM



DP Dual Power™
Pull the lever down for hard materials, press up for soft materials. In the down position, thrust force is increased by about 40%.



Enhanced SST™
With a 20% larger contact surface area between plunger and valve plate, there is no loss in thrust force.




TT Twin Thrust System™
The four-point system strengthens thrust force on the plunger. This means it can be used with ease, even with hard materials.

FUNCTIONS



360° RH 360° Rotating Handle™
Ideal for maneuvering in and around tight spaces.

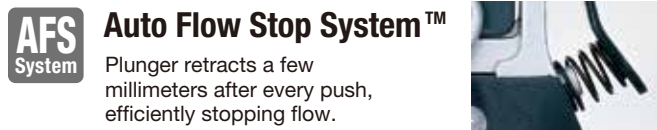

AFS System Auto Flow Stop System™
Plunger retracts a few millimeters after every push, efficiently stopping flow.

Ideal Retail Display

Let us help you display and promote your Tajima products!



www.tajimatool.com



@tajimatoolusa



For more information, please contact our marketing department at orderdesk@tajimatool.com

TAJIMA TOOL CORPORATION 3510 Torrance Blvd., Suite 301, Torrance, CA 90503

Toll-Free Phone: 1-888-482-5462 www.tajimatool.com

© 2024 TAJIMA TOOL CORPORATION. ALL RIGHTS RESERVED.
No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, without the prior written permission of the publisher.
Date of issue 10/1/2024

NEW Built-in Push Rod Caulk Gun

CONVOY®

BC™



Tajima


HOT NEWS

VOL. 21

NEW CONVOY® BC™
Built-in Push Rod Caulk Gun



Push the release lever forward to retract the plunger.

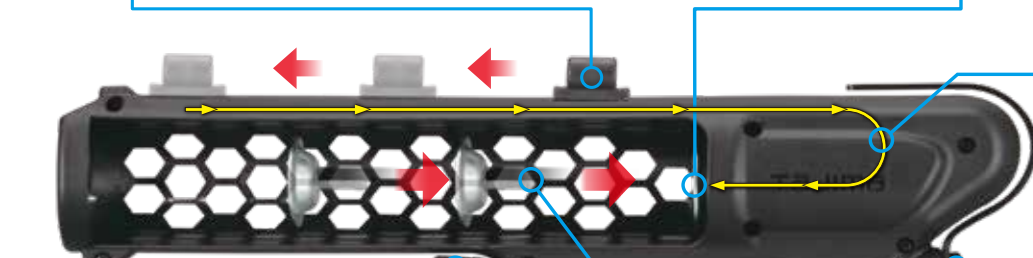

Extruding the caulking agent with a blade-shaped sliding rod
Ideal for caulking in and around tight spaces.
The overall length doesn't change even when the caulk is loaded.

How to charge and remove caulk cartridges

- ① Lift up the trigger.
- ② Push the release lever forward to retract the plunger.
- * The release lever does not move when the trigger is down.



Lift up

360 rotating mounting hook



Integrated push rod

Trigger


Elastomer non-slip grip.
Utilizing lightweight, high-strength engineering plastics for the main body and trigger

The handle is positioned at the center to provide optimal weight balance.




Integrated push rod mechanism keeps the main body compact.

Cartridge

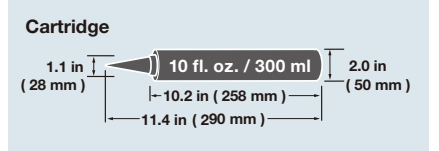

1.1 in (28 mm) 10 fl. oz. / 300 ml 2.0 in (50 mm)
10.2 in (258 mm) 11.4 in (290 mm)

Viscosity

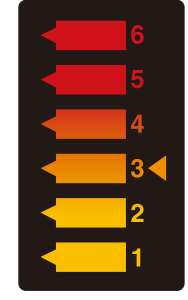

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100BC	28 oz. / 785 g	10 : 1	10 fl. oz. / 300 ml	4	16	0-49296-16565-9

CONVOY® Series Caulk Guns Lineup

NEW

1 Convoy® BC™

- Integrated push rod mechanism keeps the main body compact
- Elastomer non-slip grip
- The handle is positioned at the center to provide optimal weight balance
- 360 rotating mounting hook





STROKE DISTANCE
0.3 in (7 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100BC	28 oz. / 785 g	10 : 1	10 fl. oz. / 300 ml	4	16	0-49296-16565-9

2 Convoy® Super 26 DUO™

TT System

- For dual component adhesive cartridges
- Compatible with 1:1 and 2:1 cartridges

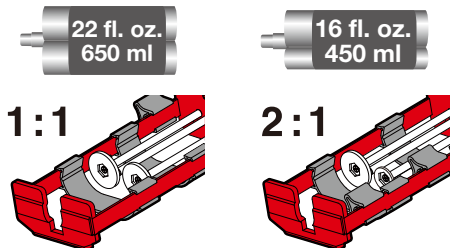

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-DSP26	58 oz. / 1,650 g	26 : 1	22 fl. oz. / 650 ml	16 fl. oz. / 450 ml	1	4	0-49296-26682-0

Smooth and reliable caulk guns with rotating handles for maneuvering in and around tight spaces, extra-long barrels for hassle-free tube reloads, and featuring thrust system options to handle any materials with ease.

3 Convoy® Super 26 Sausage Gun 2way™

Enhanced SST 360° RH



CNV-FSP26-600

STROKE DISTANCE
0.2 in (4 mm)

Convoy® Super Sausage Gun 2way™

TT System 360° RH AFS System



CNV-FSP600

STROKE DISTANCE
0.3 in (7 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	SAUSAGEPACK SIZE	CASE	MASTER CARTON	UPC
CNV-FSP26-600	39 oz. / 1,100 g	26 : 1	10 fl. oz. / 300 ml	20 fl. oz. / 600 ml	4	16	0-49296-26683-7
CNV-FSP600	35 oz. / 990 g	12 : 1					0-49296-26512-0

QUICK PLUNGER™



4 Convoy® Bulk Super 3way™

Enhanced SST 360° RH



STROKE DISTANCE
0.3 in (8.5 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	SAUSAGEPACK SIZE	BULK LOAD CAPACITY	CASE	MASTER CARTON	UPC
CNVBSP3W550	42 oz. / 1,200 g	10 : 1	10 fl. oz. / 300 ml	13 fl. oz. / 400 ml	Up to 18 fl. oz. / 550 ml max	1	4	0-49296-26019-4



5 Convoy® RS™

DP Enhanced SST 360° RH



STROKE DISTANCE
soft materials 0.5 in (12 mm)
hard materials 0.2 in (6 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100RS	26 oz. / 740 g	8 : 1 / 16 : 1	10 fl. oz. / 300 ml	6	24	0-49296-16855-1
CNV-900RS	33 oz. / 940 g		30 fl.oz. / 900 ml	4	16	0-49296-26517-5

- With the Enhanced SST feature, experience 20% stronger thrust force with no additional effort on your part
- Dual Power, 360 Rotating Handles with contoured grips
- Extra-long seal puncture pin
- Ideal for dispensing thick, viscous materials



6 Convoy® Super™ 26

Enhanced SST 360° RH



STROKE DISTANCE
0.2 in (4 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100SP26	25 oz. / 710 g	26 : 1	10 fl. oz. / 300 ml	6	24	0-49296-16561-1
CNV-900SP26	35 oz. / 1,005 g		30 fl. oz. / 900 ml	4	16	0-49296-16563-5

- With the Enhanced SST feature, experience 20% stronger thrust force with no additional effort on your part
- 360 Rotating Handles with elastomer non-slip grips
- Extra-long seal puncture pin
- Ideal for dispensing extra-thick, viscous materials



7 Convoy® Super™ 18

Enhanced SST 360° RH



STROKE DISTANCE
0.2 in (6 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100SP18	25 oz. / 710 g	18 : 1	10 fl. oz. / 300 ml	6	24	0-49296-16560-4
CNV-900SP18	35 oz. / 1,005 g		30 fl. oz. / 900 ml	4	16	0-49296-16562-8

- With the Enhanced SST feature, experience 20% stronger thrust force with no additional effort on your part
- 360 Rotating Handles with contoured grips
- Extra-long seal puncture pin
- Ideal for dispensing thick, viscous materials



8 Convoy® Super™

TT System 360° RH AFS System



STROKE DISTANCE
0.5 in (12 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100SP	25 oz. / 710 g	12 : 1	10 fl. oz. / 300 ml	6	24	0-49296-06720-5
CNV-J900SP	35 oz. / 1,005 g		30 fl. oz. / 900 ml	4	16	0-49296-06751-9

- Extra-long barrel caulk guns engineered for maximum performance
- Increased thrust force with the powerful Twin-Thrust System
- 360 Rotating Handles for function and convenience
- Conveniently located seal puncture pin

Twin-Thrust System™



Seal Puncture Pin



9 Convoy® Plus II™

TT System 360° RH AFS System



STROKE DISTANCE
0.5 in (12 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100PL2	21 oz. / 605 g	7 : 1	10 fl. oz. / 300 ml	6	24	0-49296-06696-3
CNV-J900PL2	32 oz. / 900 g		30 fl. oz. / 900 ml	4	16	0-49296-06705-2

- Extra-long barrel caulk guns
- Increased thrust force with the powerful Twin-Thrust System
- Automatic Flow-Stop System
- 360 Rotating Handles
- Conveniently located seal puncture pin

Twin-Thrust System™



Seal Puncture Pin



10 Convoy® Lite™

TT System AFS System



STROKE DISTANCE
0.4 in (10 mm)

ITEM CODE	WEIGHT	THRUST RATIO	CARTRIDGE SIZE	CASE	MASTER CARTON	UPC
CNV-100LT	17 oz. / 480 g	7 : 1	10 fl. oz. / 300 ml	6	24	0-49296-06628-4

- Ultra-lightweight caulk guns help alleviate fatigue from extended use
- Unique twist-lock barrel removal system allows for fast and easy tube changes
- Increased thrust force with the powerful twin-thrust dispensing system
- Automatic Flow-Stop System

Twin-Thrust System™



Twist-Lock Barrel Removal System

